


SPECIFICATIONS

(Typical values for batteries stored at 20°C for one year)

Nominal Capacity(At 2 mA/20°C/68°F/2.0V Cut-Off)	2.4 Ah
Open Circuit Voltage(At 20°C/68°F)	3.67 V
Nominal Voltage(At 2mA/20°C/68°F)	3.5 V
Maximum Continuous Current	100 mA
Maximum Pulse Current Capability	200 mA
Rated 1 Sec. Pulse Capability(To 3V)	40 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	17.6 g(0.62 oz)
Anode Surface Area	14 cm ²
Volume	8.0 cm ³
Diameter(Max) or L X I	14.5 mm
Height(Max)	50.5 mm


Dimensions in mm

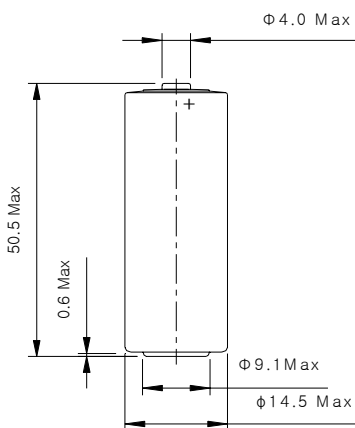


WARNING

Fire, Explosion And Severe Burn Hazard.
Do Not Recharge, Crush, Disassemble,
Heat Above 212°F(100°C), Incinerate
Or Expose Contents To Water

Voltage(V) DISCHARGE CHARACTERISTICS AT +20°C

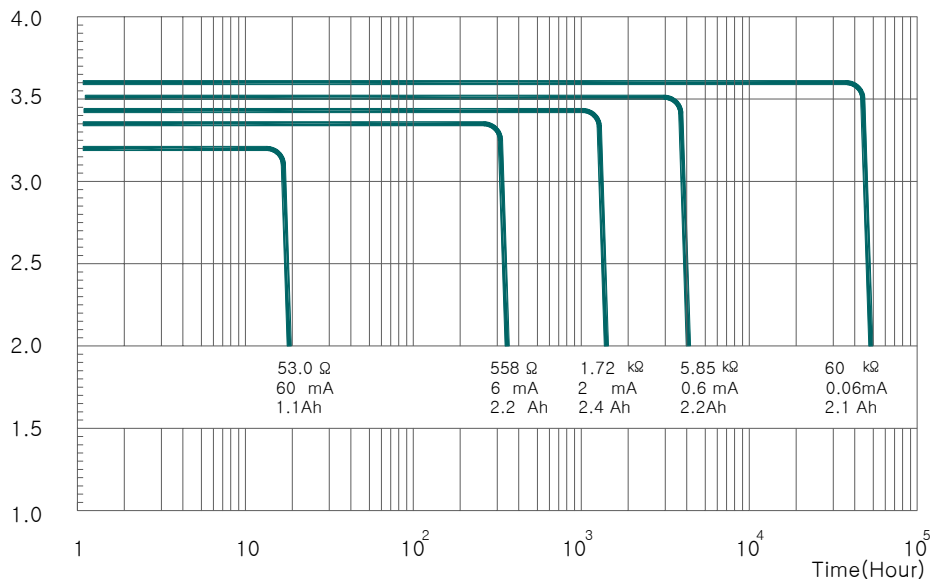

CAPACITY(Ah) CAPACITY vs. CURRENT

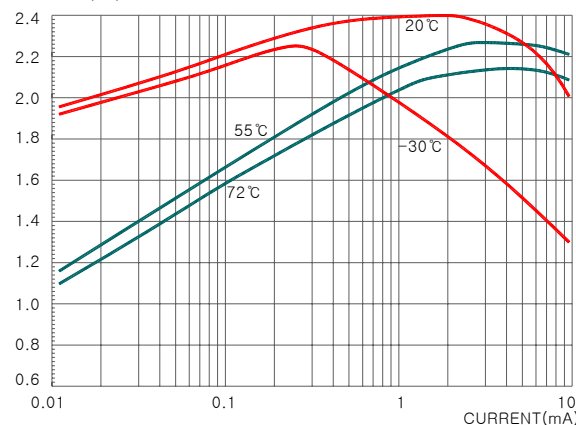

Voltage(V) TEMPERATURE vs. OPERATING VOLTAGE

