


**SPECIFICATIONS**

(Typical values for batteries stored at 20°C for one year)


Nominal Capacity(At 5mA/20°C/68°F/2.0V Cut-Off)	19 Ah
Open Circuit Voltage(At 20°C/68°F)	3.67 V
Nominal Voltage(At 5mA/20°C/68°F)	3.5 V
Maximum Continuous Current	230 mA
Maximum Pulse Current Capability	500 mA
Rated 1 Sec. Pulse Capability(To 3V)	100 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	97 g(3.26 oz)
Anode Surface Area	40 cm <sup>2</sup>
Volume	51 cm <sup>3</sup>
Diameter(Max) or L X I	33.6 mm
Height(Max)	60 mm

Dimensions in mm

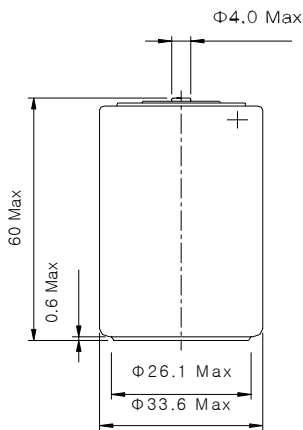


**WARNING**  
Fire, Explosion And Severe Burn Hazard.  
Do Not Recharge, Crush, Disassemble,  
Heat Above 212°F(100°C), Incinerate  
Or Expose Contents To Water

Voltage(V) DISCHARGE CHARACTERISTICS AT +20 °C

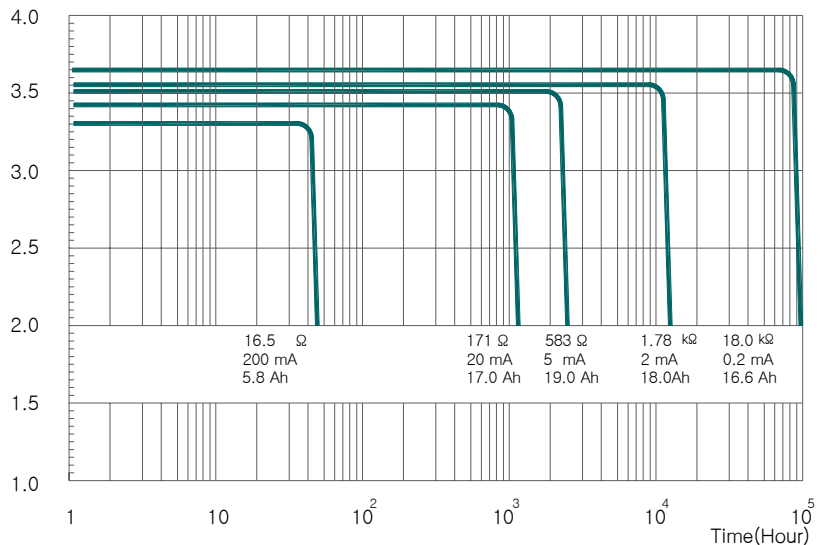

CAPACITY(Ah) CAPACITY vs. CURRENT

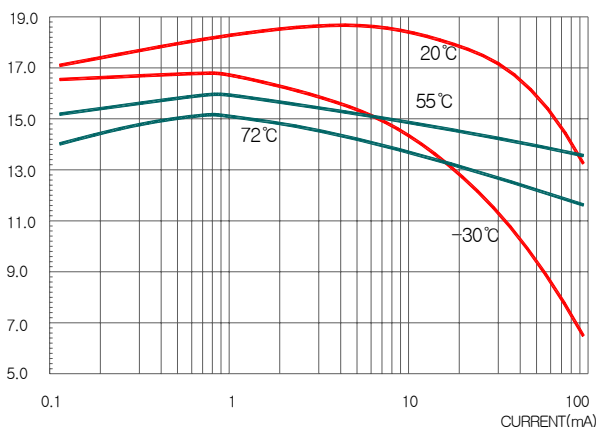

Voltage(V) TEMPERATURE vs. OPERATING VOLTAGE

